



### Features & Options

- 1,000 Foot Range with a Repeater
- Optional 79" Extendable Antenna for Optimum Reception
- Surface, Snaptrack or Din Rail Mounting
- Can Accommodate Up To 127 Analog Output Modules

The BAPI 900 MHz Receiver is used with a 418 MHz system with a repeater. The repeater receives the 418 MHz signal from the transmitters up to 100 feet away and then re-transmits the signal at 900 MHz to another repeater or the 900 MHz receiver up to 1,000 feet away.

The 900 MHz Receiver then outputs the values to any Analog Output Module through a four-wire bus. The output module converts the signal to an analog voltage, current or resistance for the controller. The 900 MHz Receiver can accommodate up to 127 different output modules. The receiver is surface, snaptrack or din rail mountable with an attached antenna or a 79" extendable antenna.


**PART #s:** BA/RCV900-EZ - 900 MHz Receiver with Attached Antenna  
 BA/RCV900-EA-EZ - 900 MHz Receiver with Extendable Antenna

[Replacement Antennas pg. F25](#)

[See end of Section F for list pricing.](#)




**900 MHz Receiver with attached antenna**

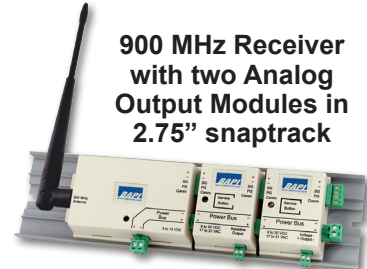

**900 MHz Receiver with two Analog Output Modules in 2.75" snaptrack**

### Associated Products

- **418 MHz Transmitters:** Measure the temp and humidity and transmit the data through 418MHz.
- **Analog Output Modules:** Converts the signal from the Receiver into a Resistance, Voltage or Current for the DDC controller.
- **Repeater:** Extends the range of the Transmitter up to 1,000 feet.

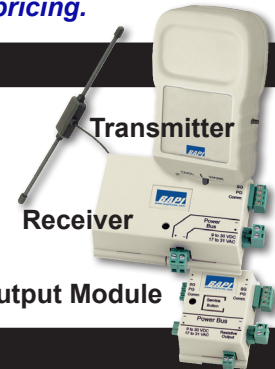

**Transmitter**

**Receiver**

**Output Module**

### Specifications

**Supply Power:** 9 to 15 VDC  
**Power Consumption:** 80 mA max. DC  
**Bus Cable Distance:**  
 4,000 ft with shielded, twisted pair cable  
 (Belden 9841, Belden 8132 or equivalent)  
**Inputs:** 900MHz

**Maximum Output Modules per Receiver:** 127  
**Environmental Operation Range:**  
 Temp: 32 to 140°F (0°C to 60°C)  
 Humidity: 5 to 95% RH non-condensing  
**Material:** ABS Plastic  
**Material Rating:** UL94, V-0

