

"The tank preferred by professionals"

# BACKSTOP®

www.backstop.net

## Diaphragm Type Well Tanks

### Specifications

Factory Pre-Charge	35 PSI
System Connection	304 Stainless Steel
Diaphragm	Heavy-Duty Butyl Rubber
Liner Material	FDA Grade Polypropylene
Max. Operating Temp.	200° F
Max. Working Pressure	150 PSI



### Features & Benefits

**BackStop®** Well Tanks provide optimal control of pump performance by allowing efficient cycling, in turn, extending the life of the pump. Each **BackStop®** Well Tank is pressure rated up to **150PSI** and equipped with a solid **304 Stainless Steel** connection. We use high-grade, rolled steel for an optimal strength to weight ratio. Most models feature a rugged, stable steel base. As an added benefit, every tank comes finished with an appliance quality coating that is resistant to sunlight and harsh conditions. For your family safety concerns, all tanks are completely lead free.


### Available Sizes

Model	Volume (liters)	Volume (gal)	Height	Diameter	Sys. Con.	Ship Wt.
12-AW100	2	1/2	8-3/4"	5-1/2"	3/4"	2.5 lbs
12-AW101	8	2	12-1/2"	8"	3/4"	5 lbs
12-AW102	18	4.5	15"	11"	3/4"	9 lbs
12-AW103(S)	55	14	19-7/8"	15-1/2"	1"	19 lbs
12-AW104(S)	80	20	27"	15-1/2"	1"	27 lbs
12-AW105(S)	128	32	46-1/2"	15-1/2"	1-1/4"	43 lbs
12-AW106(S)	176	44	35-1/2"	22"	1-1/4"	52 lbs
12-AW107(S)	248	62	47"	22"	1-1/4"	88 lbs
12-AW108(S)	320	81	57"	22"	1-1/4"	108 lbs

"-S" designates stand models.

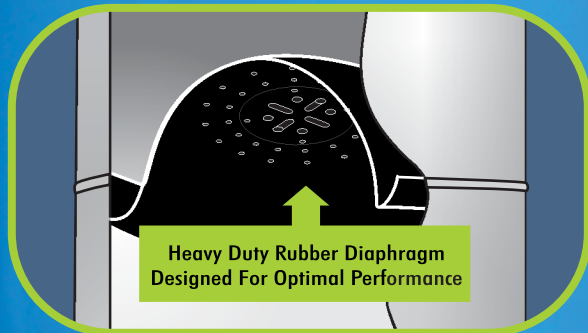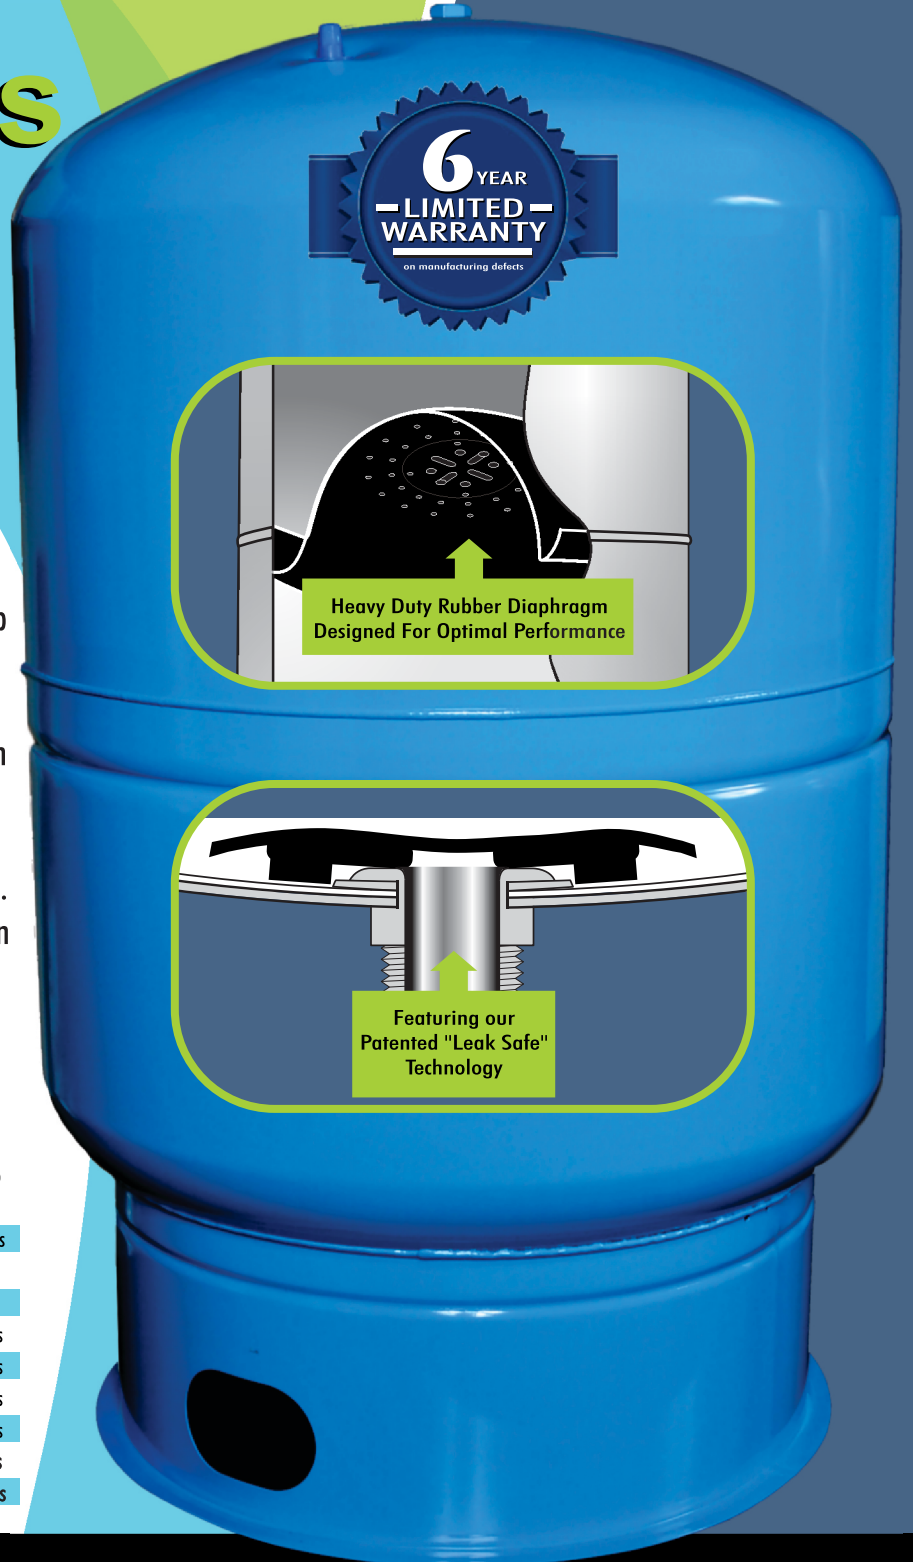

Heavy Duty Rubber Diaphragm Designed For Optimal Performance

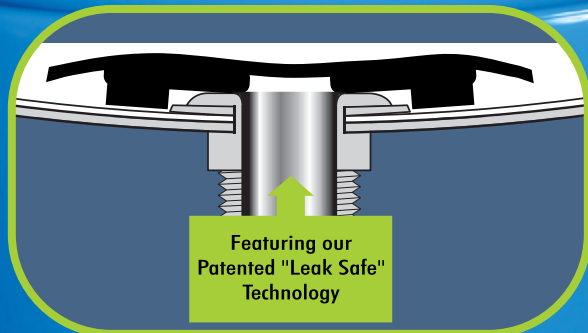

Featuring our Patented "Leak Safe" Technology